


# High Voltage & High Amperage Filters

## Single Line Feed-Through Filters Applications

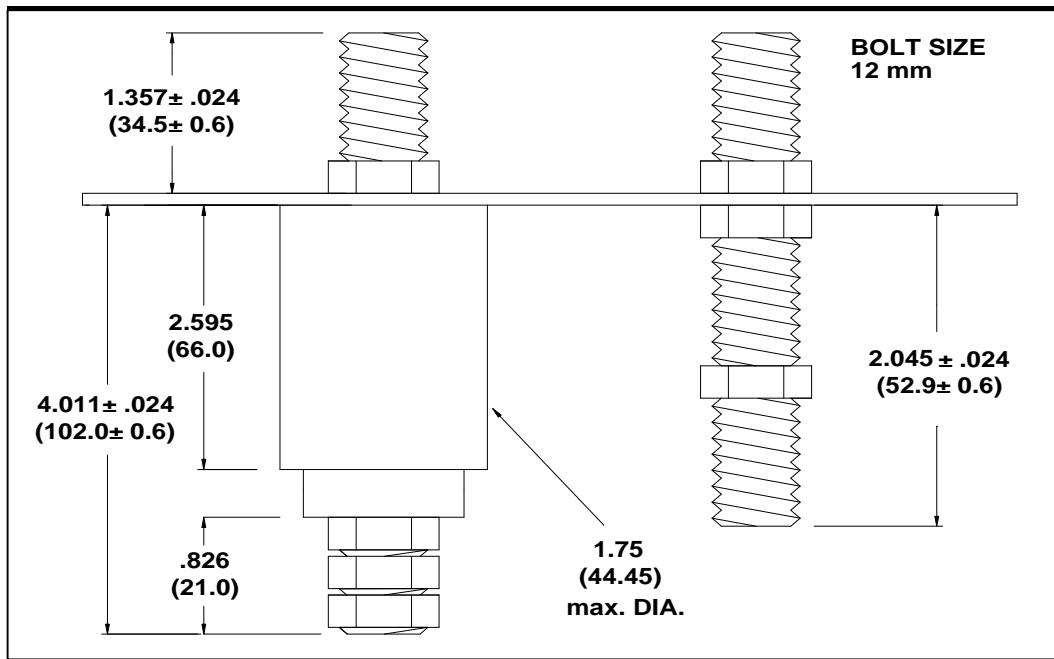

Suitable for base and switching telephone stations, as well as for high voltage and high current switch mode power supplies.

"C" Filters Part Number	Working Voltage @ + 125°C		Rated Current (A)	Minimum Capacitance ( $\mu$ F)	Lead Size	
	DC	AC			Inches	(mm)
900-103D				0.01		
900-203D	250	100	150	0.02	0.394	10,00
900-303D				0.03		
900-103D				0.01		
900-203D	250	100	200	0.02	0.472	12,00
900-303D				0.03		
900-103D				0.01		
900-203D	250	100	300	0.02	0.551	14,00
900-303D				0.03		
900-103D				0.01		
900-203D	250	100	400	0.02	0.630	16,00
900-303D				0.03		
900-103D				0.01		
900-203D	250	100	500	0.02	0.709	18,00
900-303D				0.03		

