


Circular Discoidal Arrays



INSTEC circular arrays, outline below, can also be customized to meet your specific needs. Please refer to general specifications on page 25 as well.

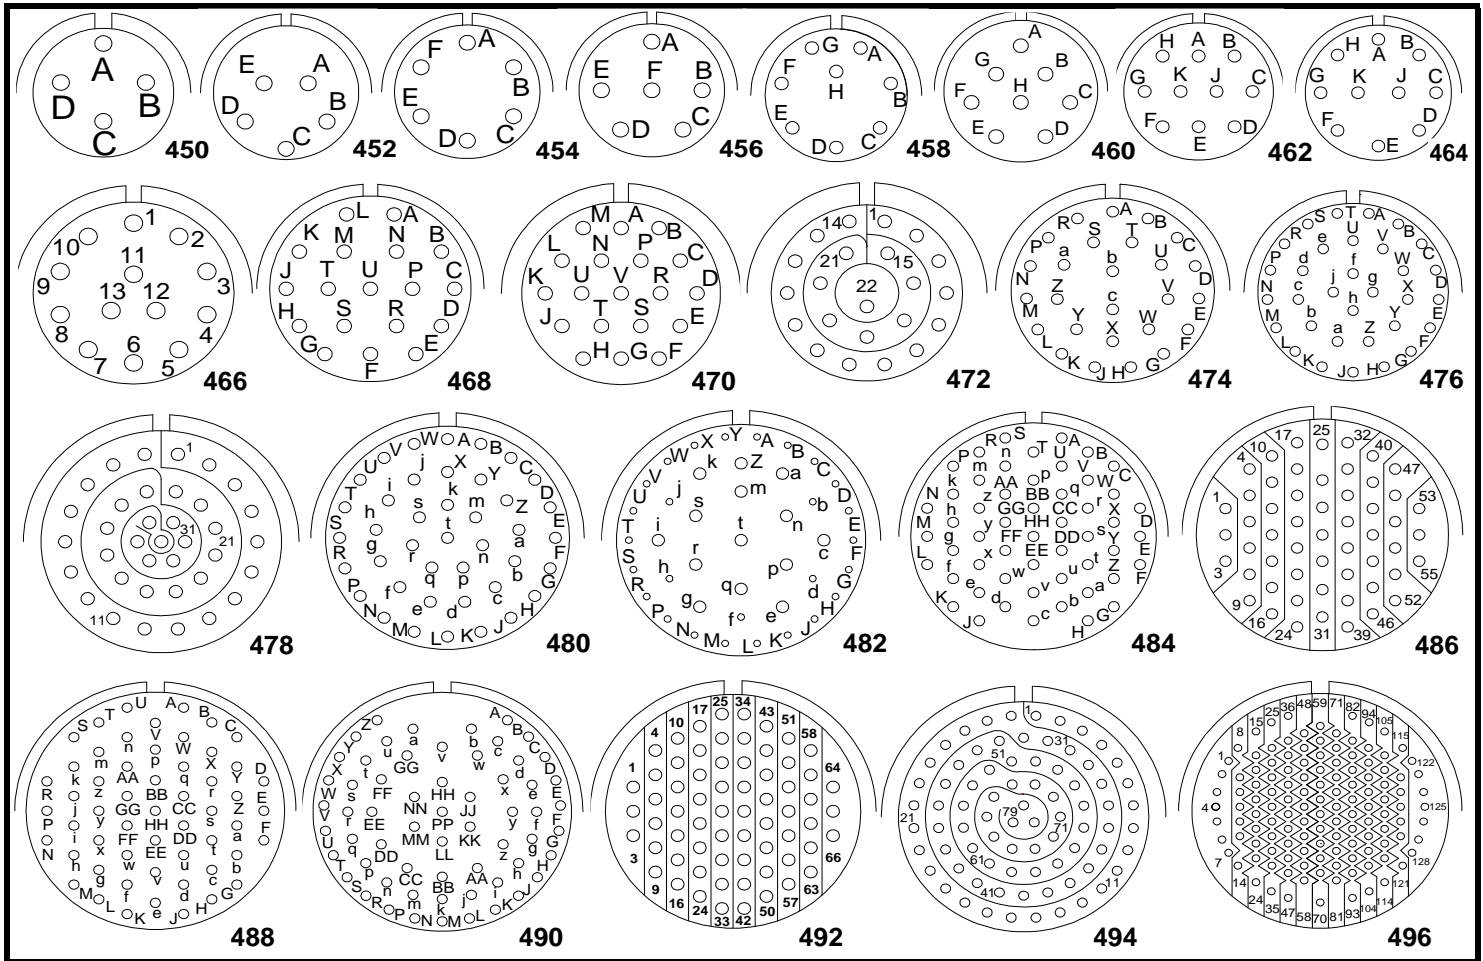

Insert Arrangement	Part Number	Max. Capacitance (uF)			Contact Size (AWG #)	Number of Contacts	O.D.	
		50 VDC	100 VDC	200 VDC			Inches	mm
8-44 , 9-44	450	.091	.059	.029	22	4	.318	8,07
10-5 , 11-5	452	.019	.012	.062	20	5	.445	11,29
10-6 , 11-6	454	.019	.012	.062	20	6	.445	11,29
10-98 , 11-96	456	.019	.012	.062	20	6	.445	11,29
12-8 , 13-8	458	.0085	.0057	.002	20	8	.525	13,32
16-8 , 17-8	460	.025	.017	.006	16	8	.615	15,61
12-10	462	.0085	.0057	.002	20	10	.575	14,59
12-98 , 13-98	464	.019	.12	.062	20	10	.575	14,59
10-35 , 11-35	466	.048	.031	.015	22	13	.438	11,12
14-18 , 15-18	468	.19	.12	.062	20	18	.686	17,41
14-19 , 15-19	470	.048	.031	.015	20	19	.672	17,05
12-35 , 18-35	472	.48	.031	.015	22	22	.550	13,96
16-26 , 17-26	474	.19	.12	.062	20	26	.857	21,75
18-32 , 19-32	476	.19	.12	.062	20	32	.897	22,77
14-35 , 15-35	478	.048	.031	.015	22	37	.667	16,93
20-41 , 21-41	480	.19	.12	.062	20	41	1.004	25,48
22-41	482	Consult Factory			27 - 20 14 - 16	41	Consult Factory	
23-53	484	.19	.12	.062	20	53	1.116	28,32
16-35 , 17-35	486	.048	.031	.015	22	55	.788	20
22-55	488	.062	.062	.062	20	55	1.141	28,96
24-61 , 25-61	490	.062	.062	.062	20	61	1.270	32,23
28-35 , 29-35	492	.048	.031	.015	20	66	.914	23,2
21-35	494	.048	.031	.015	22	79	1.004	25,48
24-35 , 25-35	496	.058	.031	.015	20	128	1.242	31,52